

# SC-Duplex-Kupplung SC-Duplex-Adaptor

## Merkmale


- Flanschbefestigung
- 2 Schrauben M2x6 beiliegend
- Hohe mechanische Belastbarkeit

## Features

- Flange mount 2 hole
- 2 bolts M2x6 attached
- Extreme mechanical stability



## Abmessungen Dimensions

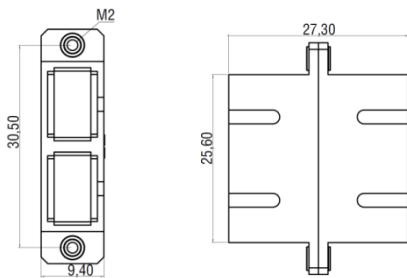

## Technische Daten Technical Data

Artikel-Nr. Part number	SDK1-9426-M25M	SDK1-9426-K25M	SDK2-9426-K25S	SDK8-9426-K25A
Bezeichnung Description	Multimode	Multimode	Singlemode	APC
Typische Dämpfung Typical loss	≤ 0,2 dB	≤ 0,15 dB	≤ 0,1 dB	≤ 0,1 dB
Gehäusematerial / Farbe Housing material / colour	Metall / beige metal / beige	Metall / beige metal / beige	Metall / blau metal / blue	Metall / grün metal / green
Material Hülse Material sleeve	Phosphor-Bronze, geschlitzt phosphor-bronze, split	ZrO <sub>2</sub> , geschlitzt ZrO <sub>2</sub> , split		
Steckzyklen Mating cycles	500	2.000	2.000	2.000
Betriebstemperatur Operating temperature	-40 °C / +85 °C			
Lagertemperatur Storage temperature	-40 °C / +90 °C			
Befestigungsart Fixing	2-Loch-Flansch / Clip 2-hole-flange / Clip			