

SC-Simplex-Kupplung / Kunststoff SC-Simplex-Adaptor / Plastic

Merkmale


- Kunststoffausführung
- Flansch-/ Clipbefestigung (Metall)
- Hohe Festigkeit

Features

- Plastic design
- Fixing with (metal) clip or flange
- Extreme stability



Abmessungen Dimensions

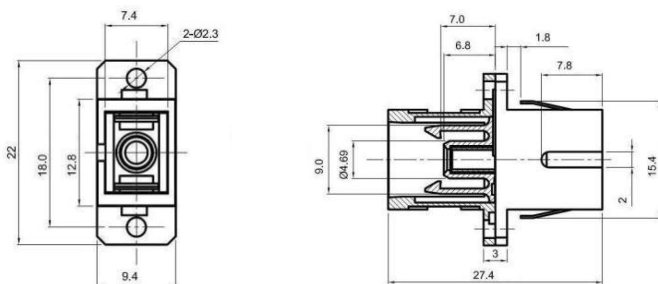

Technische Daten Technical Data

Artikel-Nr. Part number	SCK5-9413-K25x*-MC	SCK6-9413-K25S-MC	SCK7-9413-K25A-MC
Bezeichnung Description	Multimode	Singlemode	APC
Typische Dämpfung Typical loss	≤ 0,2 dB	≤ 0,2 dB	≤ 0,2 dB
Gehäusematerial / Farbe Housing material / colour	Kunststoff / beige, aqua, erikaviolett plastic / beige, aqua, violet	Kunststoff / blau plastic/ blue	Kunststoff / grün plastic / green
Material Hülse Material sleeve	ZrO ₂ , geschlitzt ZrO ₂ , split		
Steckzyklen Mating cycles	1.000		
Betriebstemperatur Operating temperature	-40 °C / +80 °C		
Lagertemperatur Storage temperature	-40 °C / +70 °C		
Befestigungsart Fixing	2-Loch-Flansch / Clip 2-hole-flange / Clip		
Zubehör optional Accessories optional			
Befestigungsmaterial Fastening fixtures	2 selbstschneidende Befestigungsschrauben, Artikel-Nr. XH13-LCSC-KUSR 2 self-cutting fastening bolts, part number XH13-LCSC-KUSR		
Anmerkungen: * M = beige, A = aqua, M-EV = erikaviolett Notes: * M = beige, A = aqua, M-EV = violet			