

# FC-Kupplung mit Rändel FC-Adaptor with knurl

## Merkmale


- Zentralbefestigung M9x0,5
- Passt in ST Lochblende
- Unterlegscheibe und Mutter beiliegend
- Multimode: Links- Rechtsrändel
- Singlemode: Rändel achsparallel
- APC: Rändel achsparallel
- Wide-Key\*

## Features

- Central fixing M9x0.5
- Fits into a patch panel with ST cut out
- Washer and nut attached
- Multimode: left-right knurl
- Singlemode: knurl axially parallel
- APC: knurl axially parallel
- Wide-Key\*



## Abmessungen Dimensions

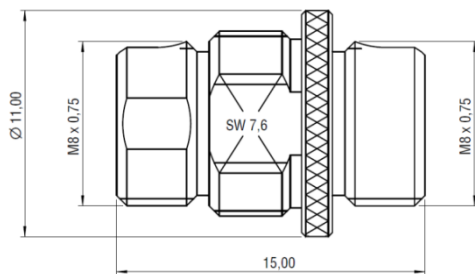

## Technische Daten Technical Data

Artikel-Nr. Part number	HBK1-FCFC-K25M	HBK2-FCFC-K25S	HBK8-FCFC-K25A
Bezeichnung Description	Multimode	Singlemode	APC
Typische Dämpfung Typical loss	≤ 0,15 dB	≤ 0,1 dB	≤ 0,1 dB
Gehäusematerial Housing material	Metall metal	Metall metal	Metall metal
Material Hülse Material sleeve	ZrO <sub>2</sub> , geschlitzt ZrO <sub>2</sub> , split		
Steckzyklen Mating cycles	2.000		
Betriebstemperatur Operating temperature	-40 °C / +85 °C		
Lagertemperatur Storage temperature	-40 °C / +90 °C		
Befestigungsart Fixing	M9x0,5 Zentral M9x0.5 central		
Anmerkung: *Small-Key auf Anfrage Note: *Small-key upon request			