


ST-Duplex-Adaptor



Features

- Metal work
- Flange mount 2 hole 2 bolts M2x6
- High mechanical stability

Dimensions

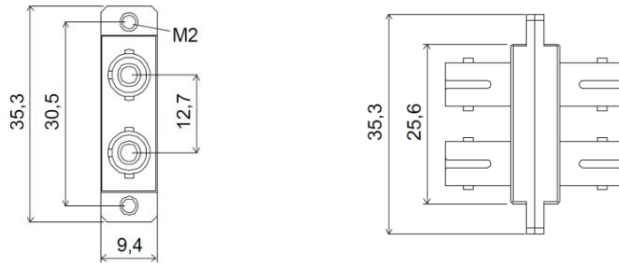

Technical Data

Part number	STD1-9426-M25M	STD1-9426-K25M	STD2-9426-K25S
Description	Multimode	Multimode	Singlemode
Typical loss	≤ 0,2 dB	≤ 0,15 dB	≤ 0,1 dB
Housing material	metal	metal	metal
Material sleeve	phosphor-bronze, spit	ZrO ₂ , split	
Mating cycles	500	2.000	2.000
Operating temperature	-40 °C / +85 °C		
Storage temperature	-40 °C / +90 °C		
Fixing	2-hole-flange / Clip		
Notes: Also available as hybrid-version SC-ST (see SC-Adaptors)			